


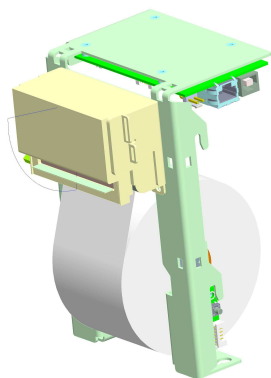

SPECIFICATION

ECCO KIOSK PRINTER FLS-622-CT-100 PRELIMINARY

ECCO FLS-622-CT-100**Receipt- and Kiosk Printer****Operating field:**

Banking ATM
Multimedia
Public transport
Electronic Cash
Industrial
Self servicing machine
Parking
Gambling
Point of information
Point of order
Point of sales
Point of interest

Applications:

Receipt- Printer
Ticket- Printer
Protocol- Printer
Kiosk- Printer

Maintenance and Service:

Easy change of paper roll, front loading;
Paper front insertion;
Easy „Clip-in“ function for assembly;
Small depth of system;
Thermal head, Cutter as well as printer mechanism or interface board can be replaced easily;

Emulation	Driver in Bit- Image Mode for Windows 2000, XP, Linux CUPS or ASCII Mode with ESC/FS Commands
Printing method	Non impact line Direct thermal sensitive
Resolution	203 dpi
Print speed	Up to 100 mm/sec
Print width	56 mm
Interfaces	USB Full Speed, RS232 (115 kb)
Control panel	Display: Status LED Keyboard: Paperfeed push bottom Test push bottom

Paper management:

Paper width	58 mm
Paper length	no limit
Paper weight	60 – 80 g/m ²
Paper stock	Roll
Diameter roll	max. 100 mm
Paper Typ	Direct thermal paper
Paper length	no Limit or format length
Paper cutting	full- or partial cut
Sensorik	complete monitoring of the paper path. PVE, PE
Lifetime print- head	at least 50 Km of printed Lines
Lifetime Cutter	500.000 cuts
Power supply	24V DC
Current consumption	stand by: 0,15 A typical: 1,2 A peak: 2,5 A
Operating temperature	-10°... +70° Celsius (no condensation)
Storage temperature	-20°... +70° Celsius (no condensation)
Dimensions (W*D*H) [mm]	112x115,5x170mm with paper roll
Weight with out paper	ca. 675 g

ASCII Mode:

Print direction	Portrait/Landscape/Upside down
Fonts/CodePages	numbers of Character dependent on free Memory
Standard Font 203dpi	CodePage 437 in Arial 20, 16, 14, 12 and 10 *22 Dots available: 437, 737, 850, 852, 857, 860, 866, 869, 1252, 1253, 1254
Character addressing	1Byte CodePage 2Byte Unicode
Character modification	Enlarge, emphasise, underline, Reverse, italic, sub/super script
Graphical Logo or text	numbers of Logo dependent on free Memory

Memory	448 KB Flash fore Fonts, Label and Download Character
Barcodes	Code 2 of 5, Codabar, Code 39, Code 128, EAN-8/13/128, UPCA/E

Tools:

Logo	Creating of downloadable graphical- Logos
------	---

Specifications**General:**

SpecE ECCO FLS-622-CT-100 Rev 1 00 Rev. 1.00 dated 12.03.10
itp systems & solutions GmbH & Co KG
info@itpsyso.com; www.itpsyso.com